








Thermocouple

ASTC-W

Thermocouple ASTC-W

- Single or Double Thermocouple
- Type K, J, T, N, E, B, R, S
- Tolerance class 1 or 2 as IEC584, ANSI MC 96.1 Standard or Special
- Hot Joint: insulated, grounded
- Oxide Mineral execution (MgO)
- Diameters from 0.5mm to 8mm (diameters 0.25mm and 10mm on request)
- Sheath in AISI316, Inconel600 (Aisi 304,310, 321 on request)
- Junction transition in AISI with crease-resistance spring
- Extension cable with various size and insulations (Pvc, Teflon, silicon rubber, Kapton, armour fiberglass)
- Mignon or Standard connectors directly inserted on the sheath
- DIN BAR Transmitter
- Fix or sliding compression fittings in AISI
- Option of plate for contact measuring

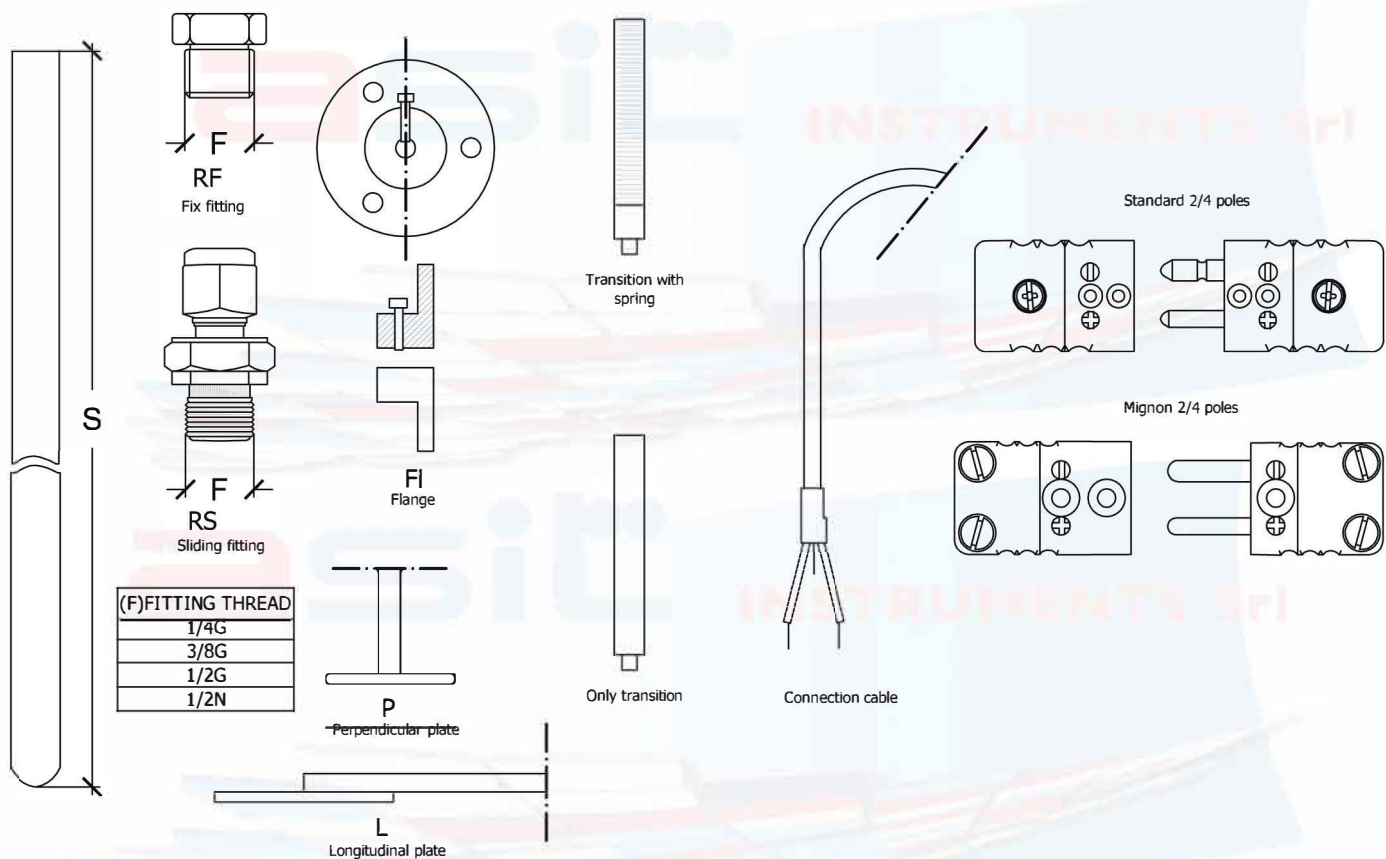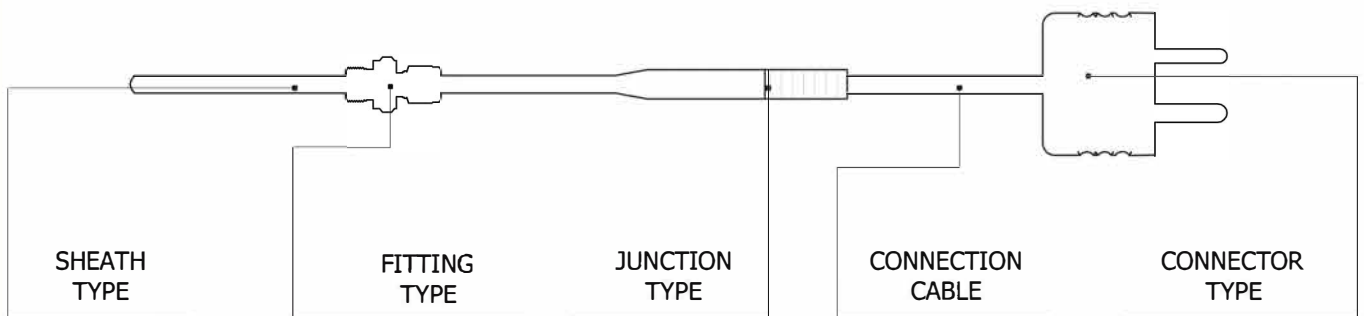

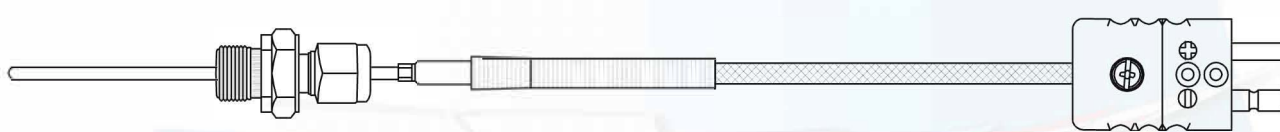

asit
INSTRUMENTS Srl