



Thermocouple

Model ASTC-P

Thermocouple Model ASTC-P

Stamp-like or block Thermocouple for contact survey

Type K, J, T, N. Other types upon request

Tolerance Class 1 or 2 according to CEI EN60584-1, Standard o Special according to ASTM E230

Hot joint: insulated


Plate (adhesive stamp) in Kapton or Fibreglass TTS.

Aluminum or Copper block (option for through hole or adhesive for the fixing)

Thermocouple type cable in various size and insulation (Pvc, Teflon, Silicone rubber, Fibreglass TTS)

Polarized connector inserted directly on the cable

Temperature transmitter DIN rail upon request

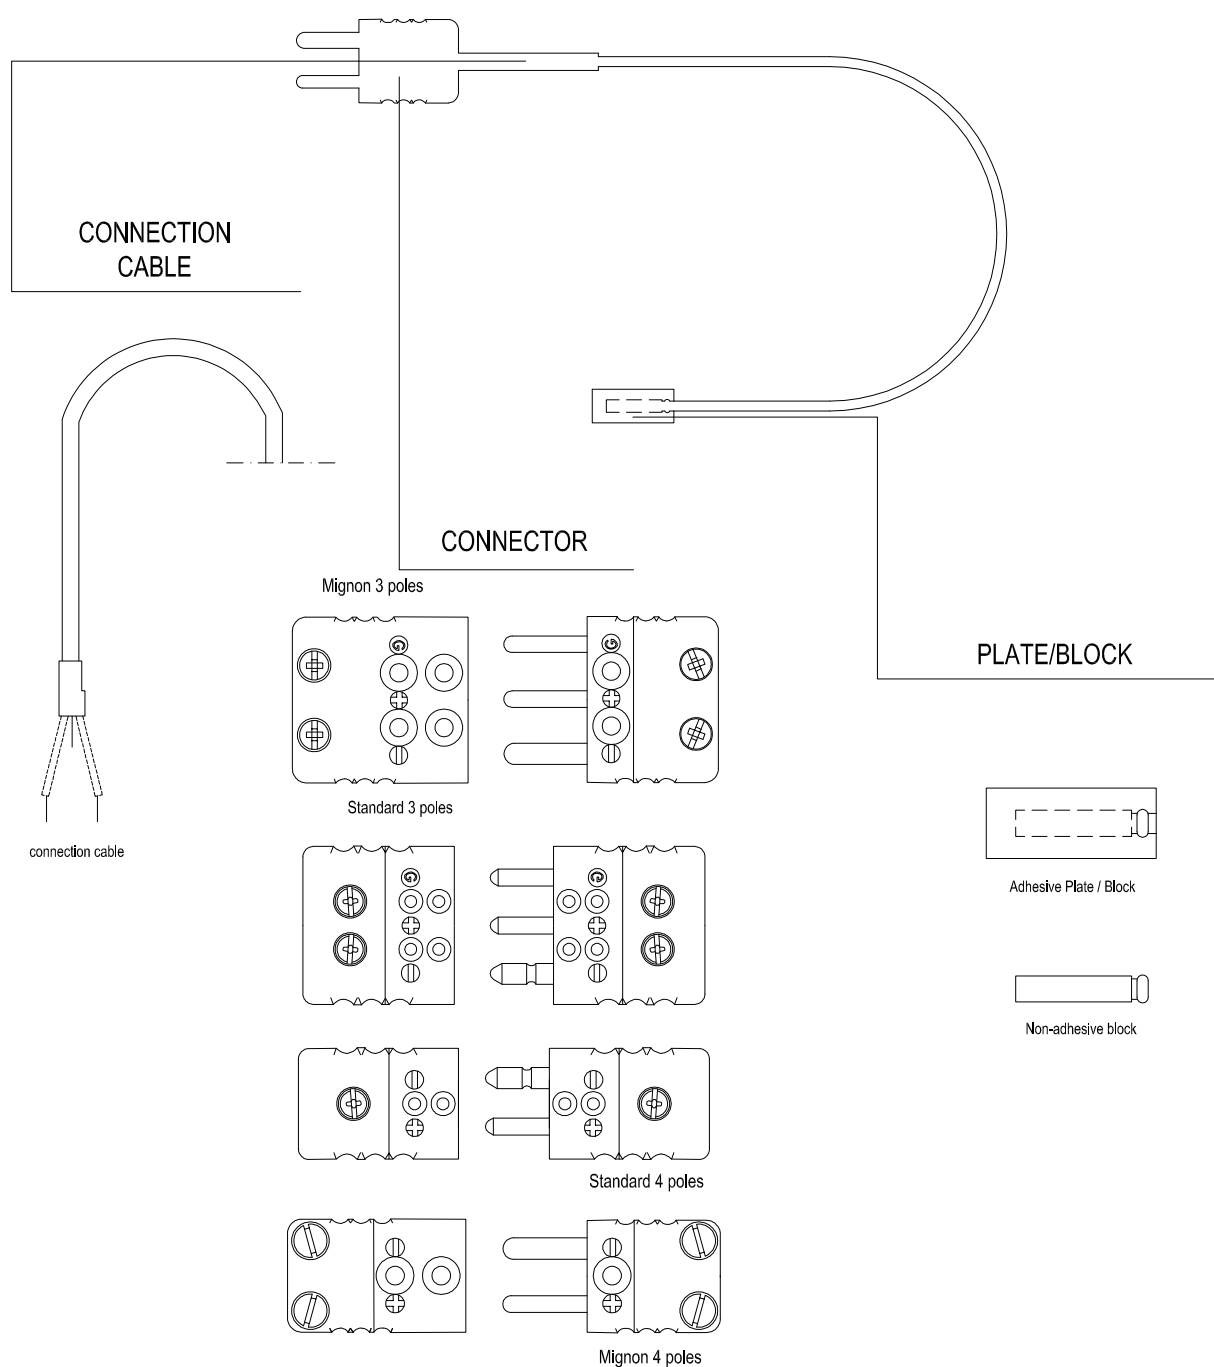

MODEL	
Thermocouple K type	K
Thermocouple J type	J
Thermocouple N type	T
Thermocouple T type	N
Other types upon request	

HOT JOINT	
Insulated joint	a

TOLERANCE	
Class 1, CEI EN60584-1	1
Class 2, CEI EN60584-1	2
Class Special, ASTM E230	A
Class Standard, ASTM E230	B

CONNECTION CABLE	
PVC	Pv
Silicone rubber	Gs
Teflon	Te
Fiberglass TTS	Fb

CABLE LENGTH	
meter	

ADHESIVE PLATE/BLOCK	
Adhesive Kapton tape	Ka
Adhesive TTS tape	Fb
Adhesive Aluminum block	bAa
Adhesive Copper block	bCua

NON ADHESIVE BLOCK	
Aluminum block	bA
Copper block	bCu

TAPE PLATE DIMENSION	
20 x 20 mm	p20
20 x 30 mm	p30
20 x (other dimensions upon request)	A

BLOCK DIMENSION	
Aluminum 30x10x5 mm	Al30
Copper 30x10x8 mm	Cu30
Other upon request	A

CONNECTOR	
Miniature 2 poles (male)	CmM
Standard 2 poles (male)	CsM

ACCREDIA CALIBRATION	A
----------------------	---

OPTION	
Temperature transmitter DIN rail	Tx



